



## **Main Features**

- Housing made of industrial grade strong plastic top and metal bottom
- 10 wide keys with durable metal dome switch
- Sealed flat panel membrane design
- PCB can be protected by conformal coating (optional, good for hot and humid working environment)
- All keys are programmable, powered by our Matrix Maker
- With RJ45-plug cable design, ease the cable replacement
- USB and RF are available
- Easy to extract the paper layout for replacement purpose

## **Technical Specification**








[Electronics]	
USB interface	
Power supply	+5V/DC ±5%
Current input	< 100mA
MTBF	50,000 hours
RF interface	
Input voltage	2V to 3V
Working current	5mA
Sleeping current	30uA
[Others]	
Storage temperature	-40°C to +60°C
Operating temperature	0°C to +50°C
Operating humidity	20% to 90%
Dimensions	175 x 95 x 26.6 mm


- Heng Yu Technology (HK) Limited
- http://www.hengyu-tech.com



## **2D Drawing**

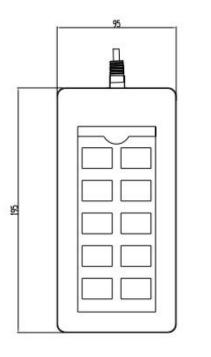



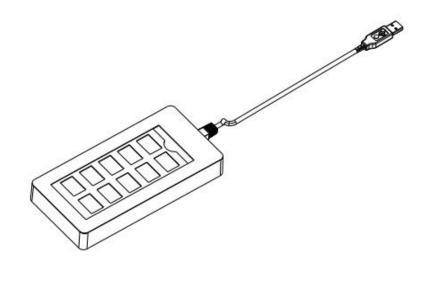

- Heng Yu Technology (HK) Limited
- http://www.hengyu-tech.com