

CK82A

		50	-						-	F10		540	-
Esc	F1	F2	F3	F4	F5	F6	F7	F8	F9	F10 Einfg	F11 [Num 3]	F12 Rollen	Pause
0	!	"	ş	\$	%	& 6	/ 🛛	(8) 9	= •	?	•	-
^	1	2 2	3 3	4	5	6	7 {	8 [9]	0 }	β\		
*	Q	W	E	R	Т	Z	U 4	5	06	P⊡	Ü	*	
	@		€									+~	#
û	A	S	D	F	G	н	J	K	2 L	3 Ö	₿	*	-
Û	>	Y	х	С	V	в	N	MØ	;	: 🗵	- 🗄	仓	Ent
U	<							μ	,	·	-	Clean	
Strg	En	Win	Alt					Alt Gr		Strg	Bild 🕈	1	Bild
											Pos 1	Ļ	

Medical Hygiene Keyboard

FENGYU

Main Features

82/83 low profile scissor keys

EasyClean key combination temporarily disables all keys for efficient disinfection

Crevice-free silicone surface can be sprayed and wiped Quickly cleaned and disinfected with hospital-approved germicidal wipes

Powered by patented cleaning scheduling and detection software

With VESA-mounting holes (75x75mm) for mounting to different equipment

Two available interfaces: USB and RF (2.4G) Wireless version powered by 3 x AAA batteries

Medical Hygiene Keyboard

CK82A

Technical Data

[Electronics] [USB] Input Voltage Range: 5V Max current consumption: less than 100mA [Wireless, RF 2.4G] Power Supply: "AAA" x 3 Input Voltage Range: 4.5V Current Consumption: ~20mA @ Key pressing (operation) ~50u A @ Idle mode


~50uA @RF suspend (Deep sleep mode)

[Mechanical]

Number of Keys: 82 (US-ANSI); 83 (EU-ISO) Key strokes life: 10 million Key Travel Distance: 2mm IP68 compliant

[Others]

Storage temperature: -40°C to +55°C Operating temperature: 0°C to +45°C Operating humidity: 40% to 90% Dimensions: 290 x 138 x 22 mm Approval and Compliance: FCC / CE / RoHS / REACH

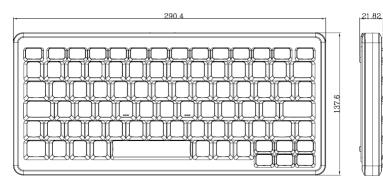





Heng Yu Technology (HK) Limited http://www.hengyu-tech.com