



DP101D POS Display

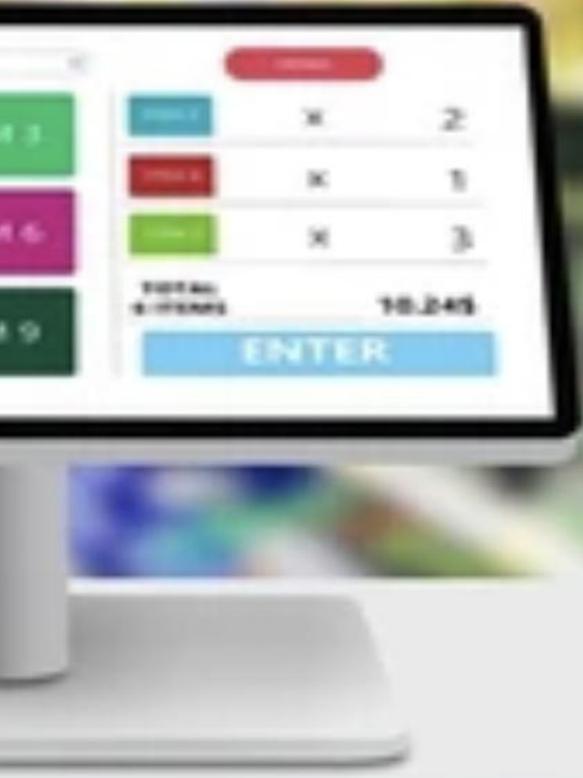

FENGYU

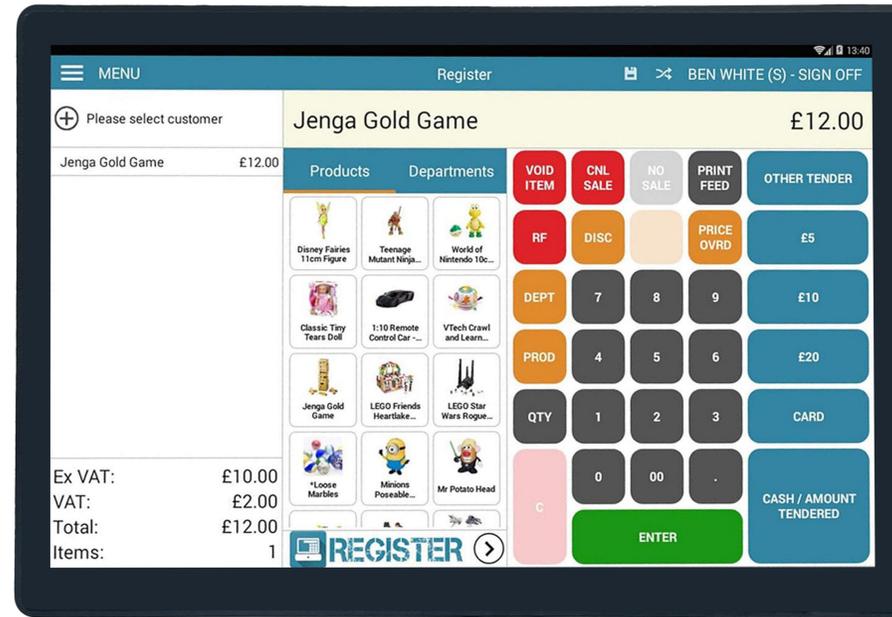

Main Features

- Sealed zero-bezel design and full metal housing
- Support HD (1280 x 800) resolution
- Available in HDMI, USB (DisplayLink Solution) interface
- Multilingual OSD Menu, with 5-UI buttons
- Support VESA mounting

Technical Specification

[Panel Spec]

Main Display Resolution: 10.1" inches (1280 x 800)

Active Area: 216.96mm x 135.6mm

Contrast Ratio: 800

Luminance: 430 cd/m²

Response Time: 30ms

Viewing Angle: 85°/ 85°/ 85°/ 85° (Up/ Down/ Left/ Right)

Touch Panel: PCAP multiple touch (10 points), optional

[Electrical]

[USB interface]

Power Input: DC 12V 2A

Current: 2A

Driver: DisplayLink DL4120


Cable Length: 1.8M (1 x USB-A to USB-C cable)

[HDMI interface]

Power Input: DC 12V 2A

Current: 2A

Cable Length: Standard HDMI cable, Length 1.8M



[Others]

Storage Temperature: -20°C ~ 70°C

Operating Temperature: 0°C ~ 60°C

Operating Humidity: 10% ~ 80%

Mounting: VESA compliant (75mm x 75mm)

Stands: DZ-004/ DZ-008







Dimensions: 237mm x 160mm x 23mm

HENGYU

Heng Yu Technology (HK) Limited

<http://www.hengyu-tech.com>

2D Drawing

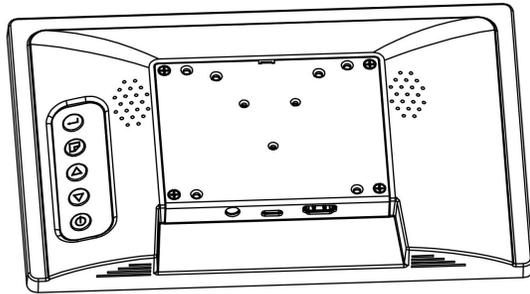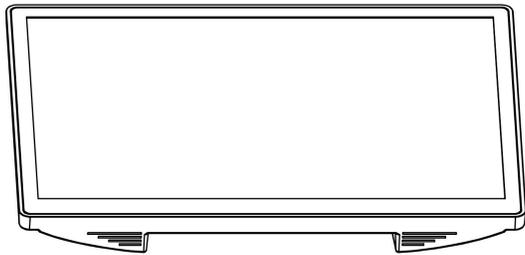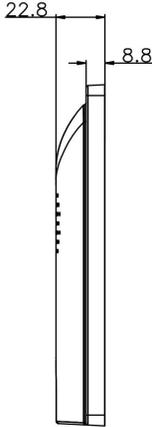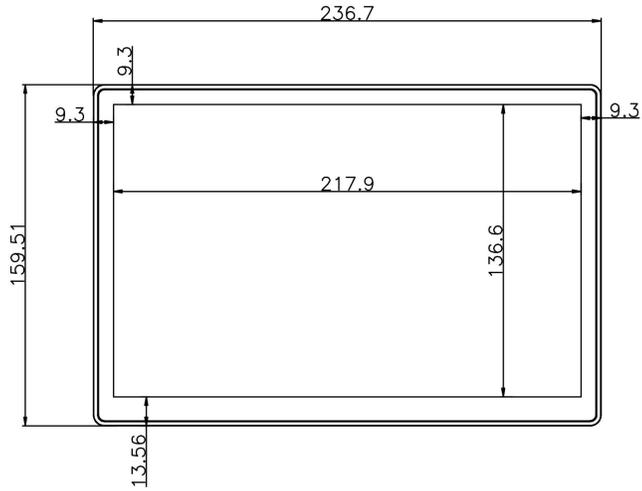

Heng Yu Technology (HK) Limited
<http://www.hengyu-tech.com>