




# DP116 POS Display

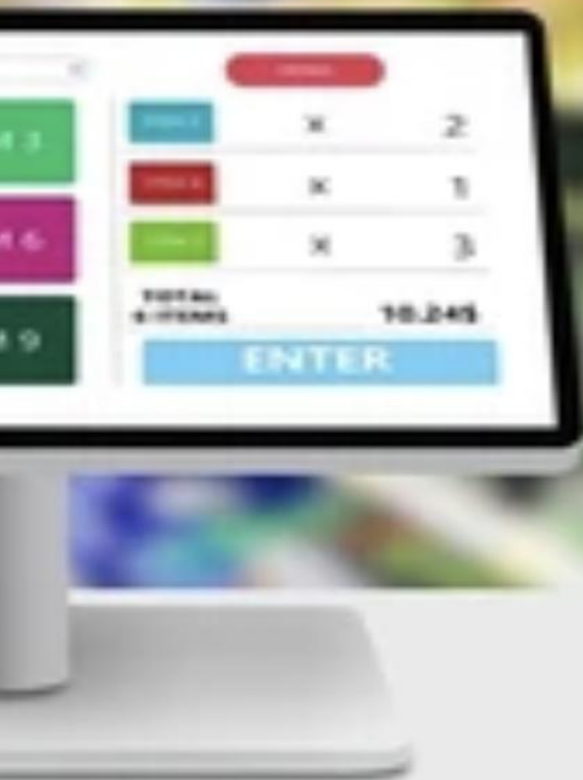

# DP116 POS Display

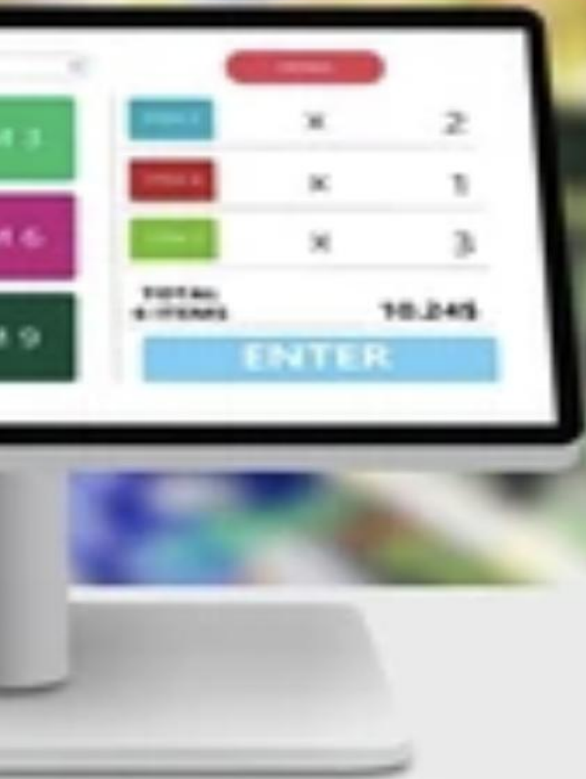

**FENGYU**

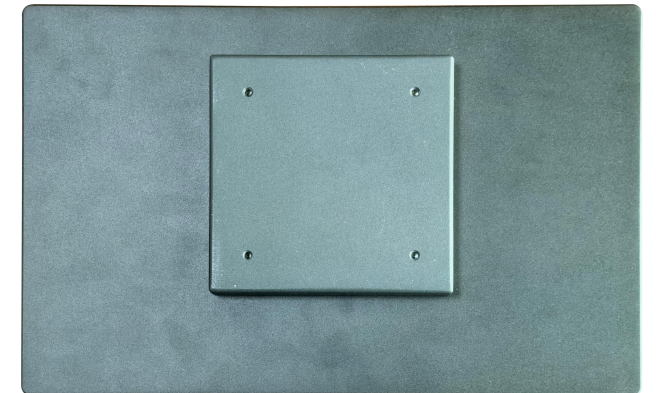

## Main Features

- Sealed zero-bezel design and full metal housing
- Support HD (1920 x 1080) resolution
- Available in HDMI, USB interface
- Multilingual OSD Menu, with 5-UI buttons
- Support VESA mounting, 75mm x 75mm

# Technical Specification

## [Panel Spec]

Main Display Resolution: 11.6" inches (1920 x 1080)

Active Area: 256.32mm x 144.18mm

Contrast Ratio: 800

Luminance: 300 cd/m<sup>2</sup>

Response Time: 30ms

Viewing Angle: 85°/ 85°/ 85°/ 85° (Up/ Down/ Left/ Right)

Touch Panel: PCAP multiple touch (10 points), optional

## [Electrical]

### [USB interface: By DisplayLink]

Power Input: USB 5V + DC IN 12V (Optional)

Current: 1.4A

Driver: DisplayLink Windows / Linux base

Cable Length: 1.8m (2 x USB-A to USB-C), at least to use one USB 3.0 port

## [HDMI interface]

Power Input: DC 12V 2A

Current: 1.4A

Cable Length: Standard HDMI cable, Length 1800mm

## [Others]

Storage Temperature: -20°C ~ 70°C

Operating Temperature: 0°C ~ 60°C

Operating Humidity: 10% ~ 80%

Mounting: VESA compliant (75mm x 75mm)

Stands: DZ-004/ DZ-007

Dimensions: 283mm x 183mm x 25mm

