


HDP-215G


Medical Hygiene Monitor

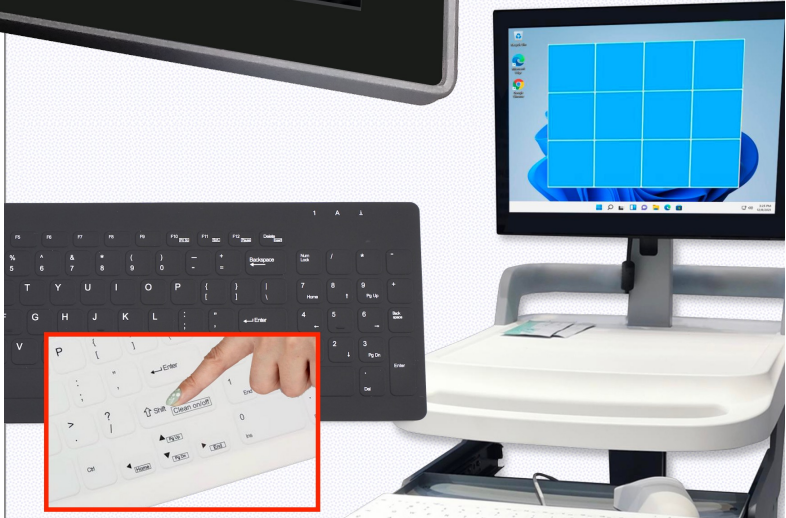

HDP-215G

Main Features

- 21.5" Display with PCAP Touch. Durable, healthcare-grade construction
- All metal, zero-bezel casing is easy to clean
- Seamless design prevents germs from hiding in crevices
- Integrated with Heng Yu hygiene keyboard to trigger the disinfection process
- Onscreen guides depict surface disinfection in real time
- Compatible with Windows and leading healthcare platforms
- Cleaning system operates whether host computer is on or off
- VESA mount monitor accommodates healthcare setup
- Available in HDMI or VGA or USB-C (thunderbolt) interface for the monitor section
- USB interface for the touch panel section
- Patented interfacing design between the hygiene monitor and keyboard for the offline disinfection function

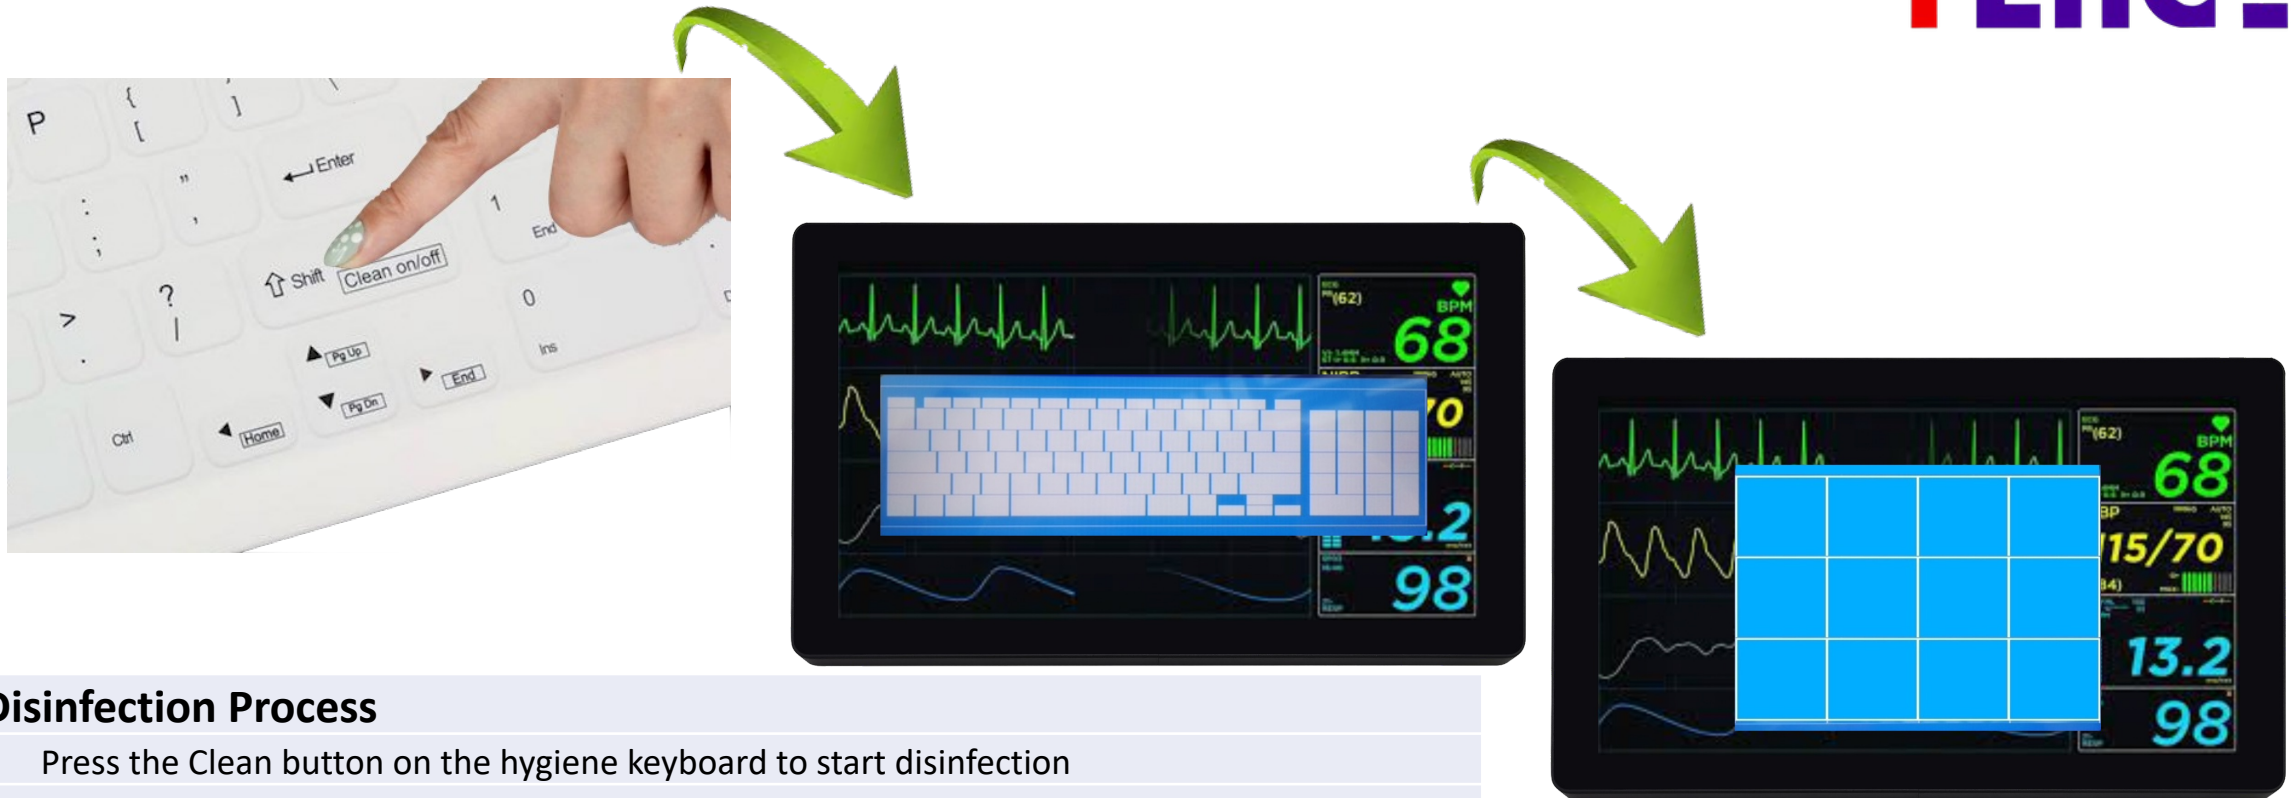

Disinfection Process

- Press the Clean button on the hygiene keyboard to start disinfection
- The hygiene keyboard will trigger the hygiene monitor to enter the disinfection mode
- Our hygiene monitor OSD will show up the keyboard shape on top of the current OS desktop
- User starts to clean the keyboard until all keys on the keyboards turn white
- The monitor OSD will then show up a 4x3 square matrix and user can start to clean the monitor screen
- Each square will turn white once the corresponding section of the screen is cleaned
- After being fully disinfected, the monitor will resume normal
- User can continue to work on the computer safely
- User can interrupt the disinfection process by pressing the Clean button again till the OSD screen disappears



Easy Clean



Disinfectable

Technical Data

[21.5" Panel Specification]

Resolution: 1920 x 1080 (ratio 16:9)

Active Area: 476.64 x 268.11, mm

Contrast Ratio: 1000:1

Luminance: 250 cd/m²

Response Time: 14ms

Viewing Angle: 89° / 89° / 89° / 89° (Up / Down / Left / Right)

Touch Panel: P-CAP multiple touch (Max.10 points)

[Electrical]

Power Input: 12V

Current: less than 2A

Interfaces for Monitor: VGA or HDMI or USB-C (Thunderbolt)

Interface for touch panel: USB

[Others]

Storage Temperature: -20°C ~ 70°C



Operating Temperature: 0°C ~ 60°C

Operating Humidity: 10% ~ 80%

Mounting: VESA compliant (100mm x 100mm)

Dimensions: 530 x 317 x 46, mm

Approval: FCC / CE

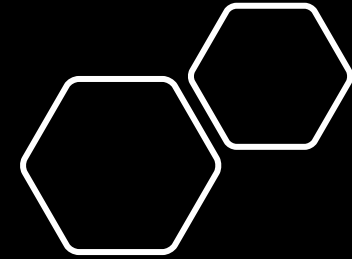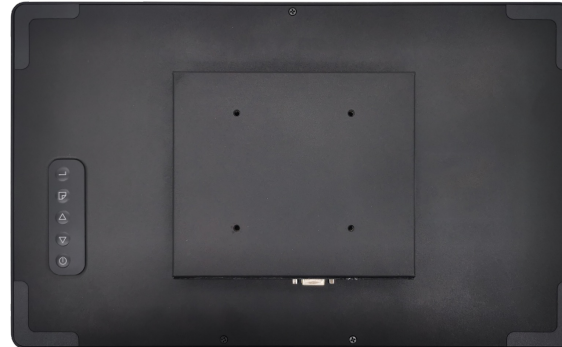

HENGYU

Heng Yu Technology (HK) Limited
<http://www.hengyu-tech.com>