


KDS-171FP

廚房系統一體機

FENGYU

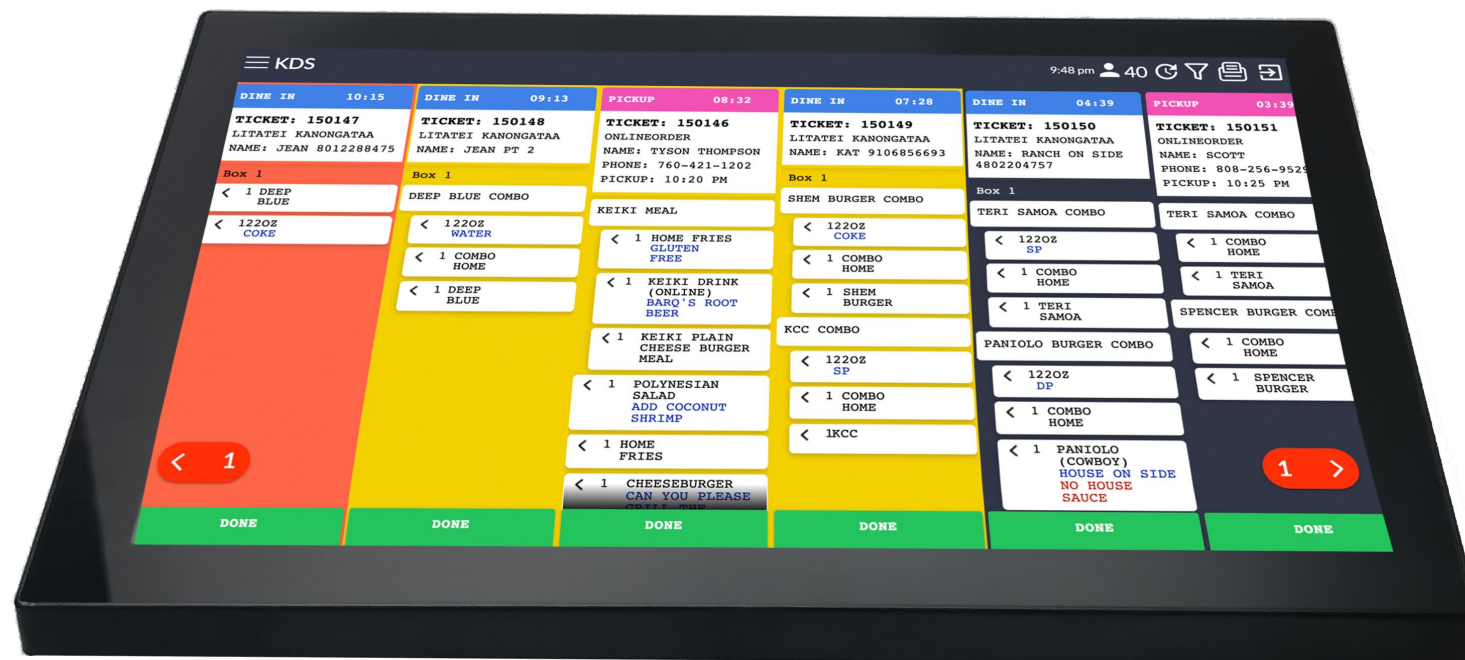

KDS-171FP

廚房系統一體機

FENGYU

主要特点

- 专业厨房17" 一体机, 加固型设计
- 配置钢化玻璃制成的坚固触摸屏
- 无风扇系统, 采用坚固的金属外壳 高品质电子工业组件, 绝对可靠
- 带母连接器插头的密封电缆线 SR 设计, 可轻松延长电缆线 长度
- 支持多种 Intel CPU 平台, Celeron、i3-Core 和 i5-Core
- 清晰明亮的触摸屏, 操作直观。 即使手指湿润或戴乳胶手套也能发挥全部功能
- 100 % 耐水和油脂蒸汽以及食品酸
- 100% 卫生, 光滑的表面和无边设计
- 可选配恒宇的自家厨房系统软件
- 可选配恒宇自家的厨房系统键盘

KDS-171FP 技術參數



Features	Model	KDS-171FP-S64	KDS-171FP-SI3	KDS-171FP-SI5
Processor	CPU	Intel® Celeron® Processor J6412	Intel® i3-1115G4	Intel® i5-1135G7
	Frequency	Up to 2.6GHz	Up to 4.1GHz	Up to 4.2GHz
Memory	Technology	Support DDR4 3200MHz, 1*non-ECC SO-DIMM Slot		
	Max. Capacity	Up to 32GB	Up to 64GB	
Display	Controller	Intel HD Graphics	Intel UHD Graphics	Intel Iris Xe Graphics
	Graphic Memory	Shared System Memory up to 1.7GB SDRAM		
	Main Display Resolution	17" (1280 x 1024), ratio 5:4		
	Active Area	337.92 x 270.336(mm)		
	Luminance	250cd/m2		
	Viewing Angle (R/ L/ U/ B)	89/ 89/ 89/ 89		
	Touch Panel	PCAP, USB protocol		
Ethernet	Controller	Realtek GBE LAN Chip (RJ45, 10/100/1000 Mbps)		
Storage	Primary	M.2 (NGFF) Key M Slot (NVME SSD, 2280)	M.2 (NGFF) PCIe4 Key M Slot (NVME SSD, 2280)	
I/O Interface	Main USB	2 x USB-A 3.0, 2 x USB-A 2.0		
	Audio	Line-Out/ Mic 3.5mm Jack		
	Serial	DB9 x 1 (Optional)		
	LAN	RJ45 / POE+ LAN (Optional)		
Options	Bumpbar	BB20A / MK15F		
Power Adaptor	Input	Universal AC 100~240V, 50/60 Hz		
	Output	DC +12V 5A/ Support POE++ power (Optional)	DC +12V 7A/ Support POE++ power (Optional)	
Environment	Storage Temperature	-15°C ~ 55°C		
	Operation Temperature	-0°C ~ 40°C		
	Operation Humidity	10% ~ 85%		
Mounting	Standard	VESA Mount 100 x 100(mm)		
Dimension	Panel (w/o stand)	391 x 326 x 56(mm)		

- 珠海恒宇新科技有限公司
- <http://www.hengyu-tech.com>