


KDS-320EP

廚房系統一體機



HENGYOU

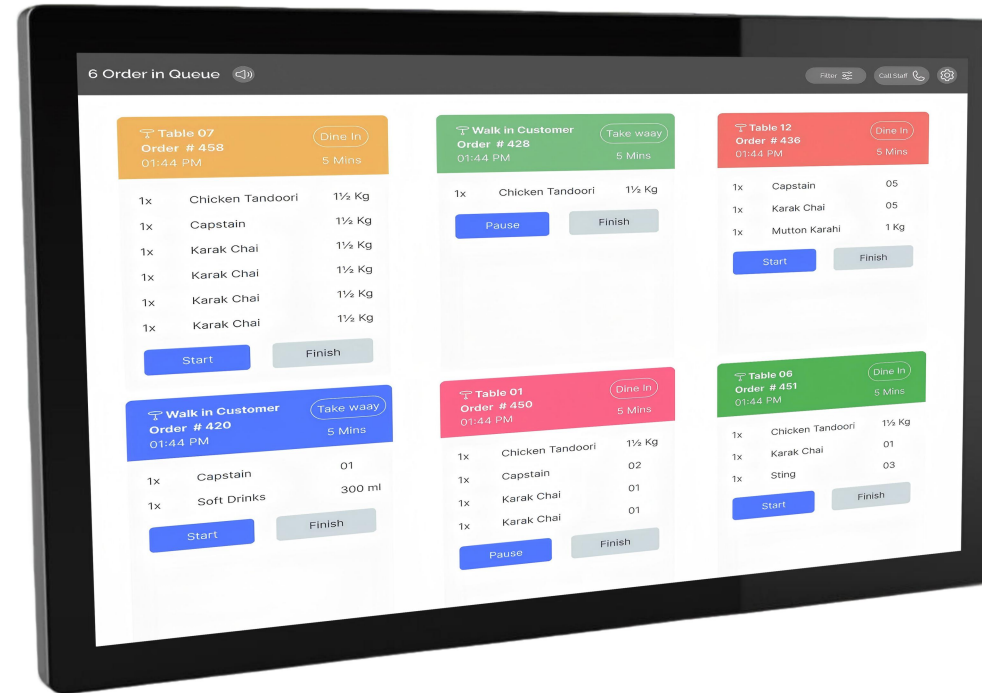

KDS-320EP

廚房系統一體機

HENGYOU

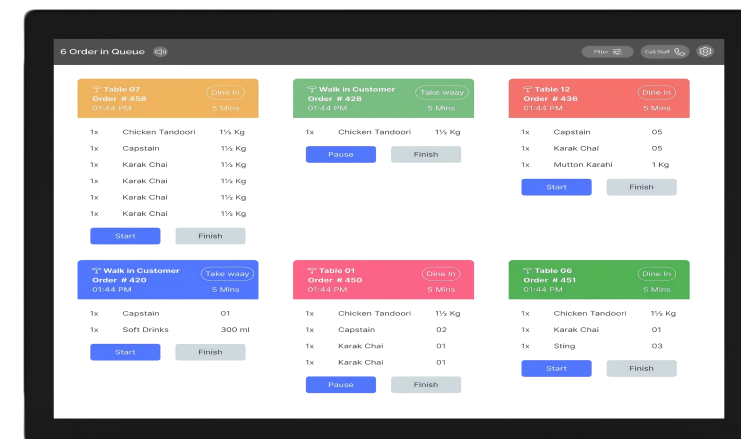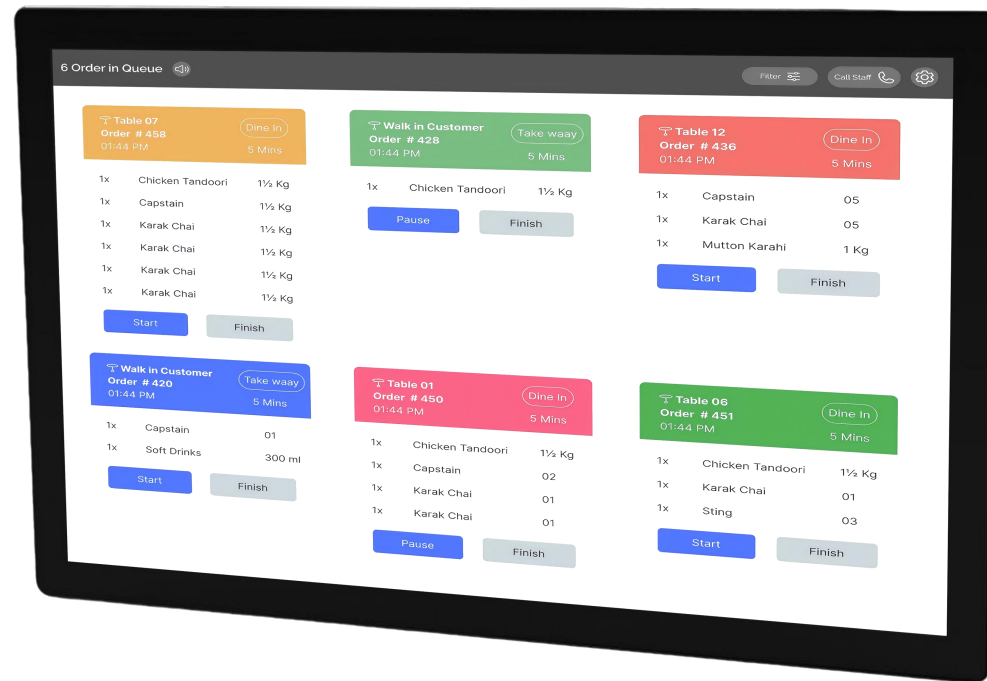

KDS-320EP

廚房系統一體機

HENGYU

主要特点

- 专业厨房32" 一体机, 加固型设计
- 配置钢化玻璃制成的坚固触摸屏
- 无风扇系统, 采用坚固的金属外壳 高品质电子工业组件, 绝对可靠
- 带母连接器插头的密封电缆线 SR 设计, 可轻松延长电缆线长度
- 未使用的电缆可以很容易地从密封的电缆室中取出
- 支持Windows 平台、Linux 平台和Android 平台
- 清晰明亮的触摸屏, 操作直观。 即使手指湿润或戴乳胶手套也能发挥全部功能
- 100 % 耐水和油脂蒸汽以及食品酸
- 100% 卫生, 光滑的表面和无边设计
- 可选配恒宇的自家厨房系统软件
- 可选配恒宇自家的厨房系统键盘

KDS-320EP

出线方式 & 防水盖设计



- 珠海恒宇新科技有限公司
- <http://www.hengyu-tech.com>

KDS-320EP -12thCPU

Windows 系统

Features	Model	KDS-320EP-N97	KDS-320EP-SI3	KDS-320EP-SI5
Processor	CPU	Intel® Alder Lake-N Series Processor	Intel® 12th i3-1215U	Intel® 12th i5-1235U
	Number of Core	4E	2P4E	2P8E
	Frequency	Up to 3.60GHz	Up to 4.4GHz/3.3GHz	Up to 4.4GHz/3.3GHz
Memory	Technology	Support DDR4 3200MHz, 1*non-ECC SO-DIMM Slot		
	Max. Capacity	Up to 32GB		
Display	Controller	Intel UHD Graphics	Intel UHD Graphics	Intel Iris Xe Graphics
	Graphic Memory	Up to 24 EUs, 1.20Ghz	Up to 64 EUs,1.10 GHz	Up to 80 Eus, 1.20 GHz
	Main Display Resolution	32" (1920 x 1080), ratio 16:9		
	Active Area	698.4 x 392.85(mm)		
	Luminance	400cd/m2		
	Viewing Angle (R/ L/ U/ B)	89/ 89/ 89/ 89		
	Touch Panel	PCAP, USB protocol		
Ethernet	Controller	Realtek GBE LAN Chip (RJ45, 10/100/1000 Mbps)		
Storage	Primary	M.2 (NGFF) Key B/B+M Slot (SATA SSD, 2280)	M.2 (NGFF) PCIe4 Key M Slot (NVME SSD, 2280)	
I/O Interface	Main USB	4 x USB-A 3.0		
	Audio	Line-Out/ Mic 3.5mm Jack		
	Serial	DB9 x 1		
	LAN	RJ45 / POE++ LAN (Optional)		
Options	Bumpbar	BB20A / MK15F / USB Speaker		
Power Adaptor	Input	Universal AC 100~240V, 50/60 Hz		
	Output	DC +24V 5A/ Support POE++ power (Optional)		
Environment	Storage Temperature	-15°C ~ 55°C		
	Operation Temperature	-0°C ~ 40°C		
	Operation Humidity	10% ~ 85%		
Mounting	Standard	VESA Mount 200 x 200 (mm)		
Dimension	Panel (w/o stand)	762 x 456 x 66 (mm)		

- 珠海恒宇新科技有限公司
- <http://www.hengyu-tech.com>