

RDP-101A

Rugged Display



RDP-101A

Rugged Display

Key Features

- Rugged aluminium housing and sealed zero-bezel design with tamper proof glass
- Using high brightness, anti-glare TFT panel with hardness 3H
- Using industrial grade PCAP touch panel, allowing multiple touch with gestures
- With built-in two USB speakers
- With built-in ambience light detection to have auto control of the screen brightness
- Two display interface option: HDMI interface or USB-C thunderbolt interface
- USB-C interface supports Samsung DEX desktop mode, operating as the second display of the mobile phone
- With Ethernet pass-through for connecting to the vehicle satellite box
- Integrate the USB hubs, thunderbolt and LAN function into ONE USB-C connector for easy connect to the mobile phone host
- With professional cable covers, combining all cables together with a soft cable shrinker

Technical Data

[Panel Spec]

TFT Panel: 10.1" 1920 (H) x 1200 (V) x 3 (RGB)
Active Area: 216.6 (H) x 135.3 (V), mm
Surface treatment: Anti-glare, hardness 3H
Contrast Ratio: 1000:1
Luminance: 1000 cd/m2
Response Time: 40ms
Viewing Angle: 80/80/80/80
Touch Panel: PCAP touch, support multi-touch (max 10 points)

[Electrical]

[Power]



Power Input: 12V
Current: less than 2A
Control buttons functions: 8

[HDMI interface version]

Display Input: HDMI connector
Display role: act as the display for vehicle satellite box
RJ45-LAN: not supported
USB hubs: USB-A x 1

[USB-C Thunderbolt version]

Display Input: USB-C connector
Display role: act as the second display of the mobile phone host
RJ45-LAN: support, converting the RJ45-LAN to USB-C LAN
USB hubs: USB-A x 1

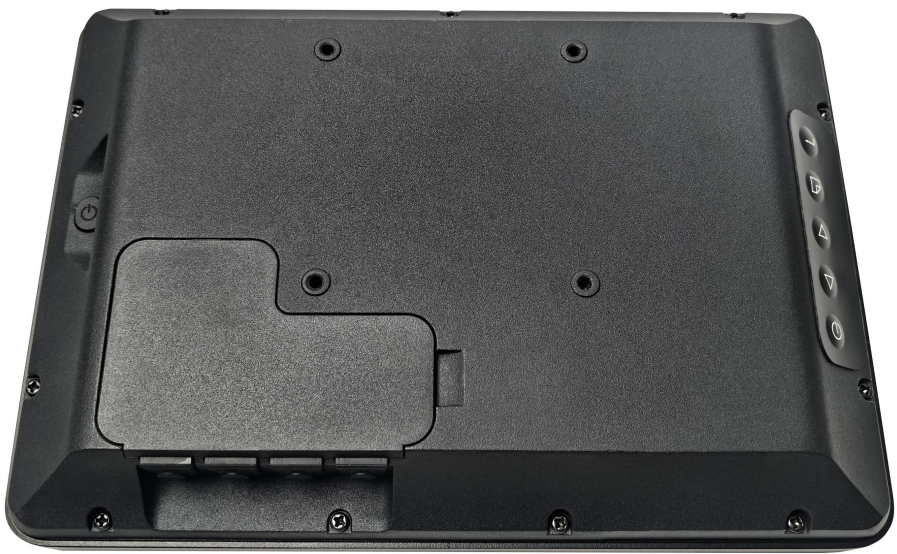

[Others]

Storage Temperature: -20°C ~ 70°C
Operating Temperature: 0°C ~ 60°C
Operating Humidity: 10% ~ 80%
Mounting: VESA 75 x 75, mm
Dimensions: 251.5 x 116.5 x 42, mm



Heng Yu Technology (HK) Limited
<http://www.hengyu-tech.com>

Technical Specification

